

ALMATEC PUMP CXM10

3/8" PLASTIC



WETTED HOUSINGS

Material	Ship Wt
PE conductive	1.00 kg (2.2 lbs)

NON-WETTED HOUSINGS

Description	Material
Center Section	PE conductive
Air Valve	PETP

ELASTOMER OPTIONS

Material	Temperature limits
EPDM™	-51.1 (-60) to +137.8 (+280) °C (F°)
PTFE	+4.4 (+40) to +104.4 (+220) °C (F°)
NBR	-12.2 (+10) to +82.2 (+180) °C (F°)


MAX FLOW RATE: 10 LPM (2.6 GPM)

MAX PRESSURE: 7 BAR (100 PSI)

MAX DIAMETER SOLIDS: 1.5 mm (0.06")

MAX SUCTION LIFT CAPABILITY:

0.7 m (2.3') Dry, 8 m (26.2') Wet

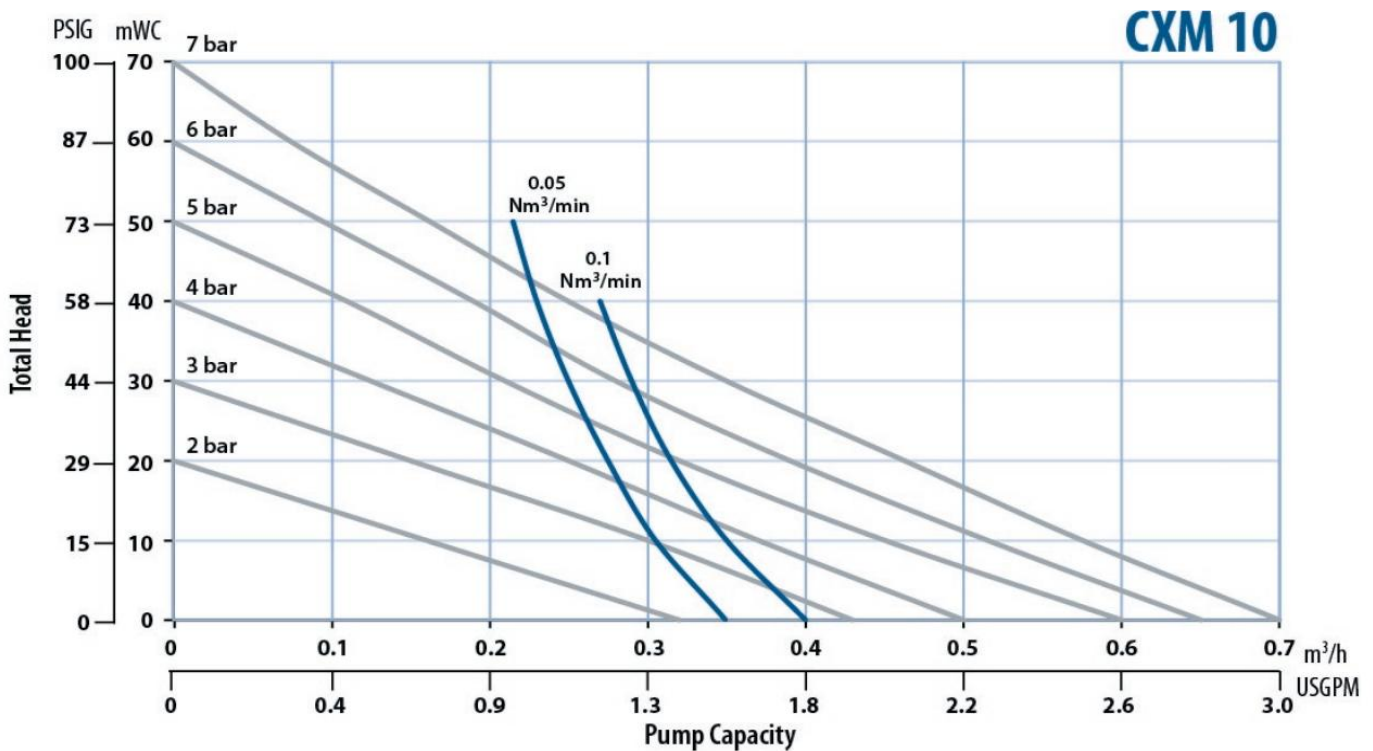

A&M INDUSTRIAL PUMPS NV/SA

DONKSESTEENWEG 8
B-2930 BRASSCHAAT
BELGIUM

PHONE

+32 (0)3 777 46 45

BTW

BE 0455.580.690

IBAN

BE73 4086 0477 5160

HRC

D-55255

INTERNET

WWW.AM-PUMPS.COM

E-MAIL

INFO@AM-PUMPS.COM